


Width 100 cm
Anchura 100 cm

Cutting of Reverstyle
obligatory lengthwise
Corte del Reverstyle obligatorio
en sentido longitudinal

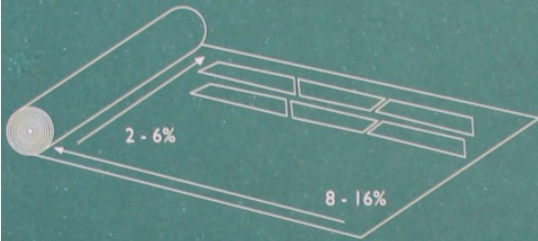

TECNICAL DATA: OD 42 • REVERSTYLE

CHARACTERISTICS	STANDARDS	VALUES	TOLERANCES
Composition	ISO 1831	Wool 66% PES 23% Viscose 11%	±1%
Weight	ISO 9073-1	250 g/m ²	235 - 260 g/m ²
Thickness	ISO 5084	1,1 mm	from 1,1 to 1,3 mm
Elongation under 3 DAN lengthwise widthwise	ISO 9073-3		from 8 to 16% from 2 to 6%
Width	ISO 3932	100 cm	± 1 cm
Length	ISO 3933	35 m	± 10 m
Distinctive features	ISO 3005 ISO 105 X12 ISO 105 X12 ISO 105 D01 ISO 105 C01	Shrinkage: Below 1% length and widthwise Resistance: Dry abrasion : 4/5 - 5 Wet abrasion : 4 Dry cleaning : 4/5 - 5 Not washable	
Observations		Thermoformable	
Packaging/Storage		Rolled in polyethylene plastic bag	

Width 90 cm
Anchura 90 cm


Cutting of classical undercollar
felt obligatory widthwise
Corte del pie de cuello clásico
en sentido transversal



Estimated waste of material between 15 and 30%
Merma de material entre 15 y 30%

FICHA TECNICA: OD 42 • REVERSTYLE

CARACTERISTICAS	NORMAS	VALORES	TOLERANCIAS
Composición	ISO 1831	Lana 66% PES 23% Viscosa 11%	±1%
Peso	ISO 9073-1	250 g/m ²	235 - 260 g/m ²
Espesor	ISO 5084	1,1 mm	de 1,1 hasta 1,3 mm
Alargamiento 3 DAN en el largo en el ancho	ISO 9073-3		de 8 hasta 16% de 2 hasta 6%
Anchura	ISO 3932	100 cm	± 1 cm
Largo	ISO 3933	35 m	± 10 m
Especificaciones	ISO 3005 ISO 105 X12 ISO 105 X12 ISO 105 D01 ISO 105 C01	Encogimiento: Menos de 1% en las dos direcciones Resistencia: Frotamiento en seco : 4/5 - 5 Frotamiento humedo : 4 Limpiado en seco : 4/5 - 5 No lavable	
Observaciones		Termoformable	
Acondicionamiento		Enrollado en saco de polietileno	





9903



9662



9931



9991



9993



9998



9946



9930



9613



9906



9661




9909



9608



9607




9902



9618



9912



9999



9929



9932



9901



9610



9996



9905



9937



9606



9956



9923



9612



9945



9953



9918



9910



9997



9614



9936



9925




9919




9904



9900




9959



9957



9981



9939